

FIG. 1

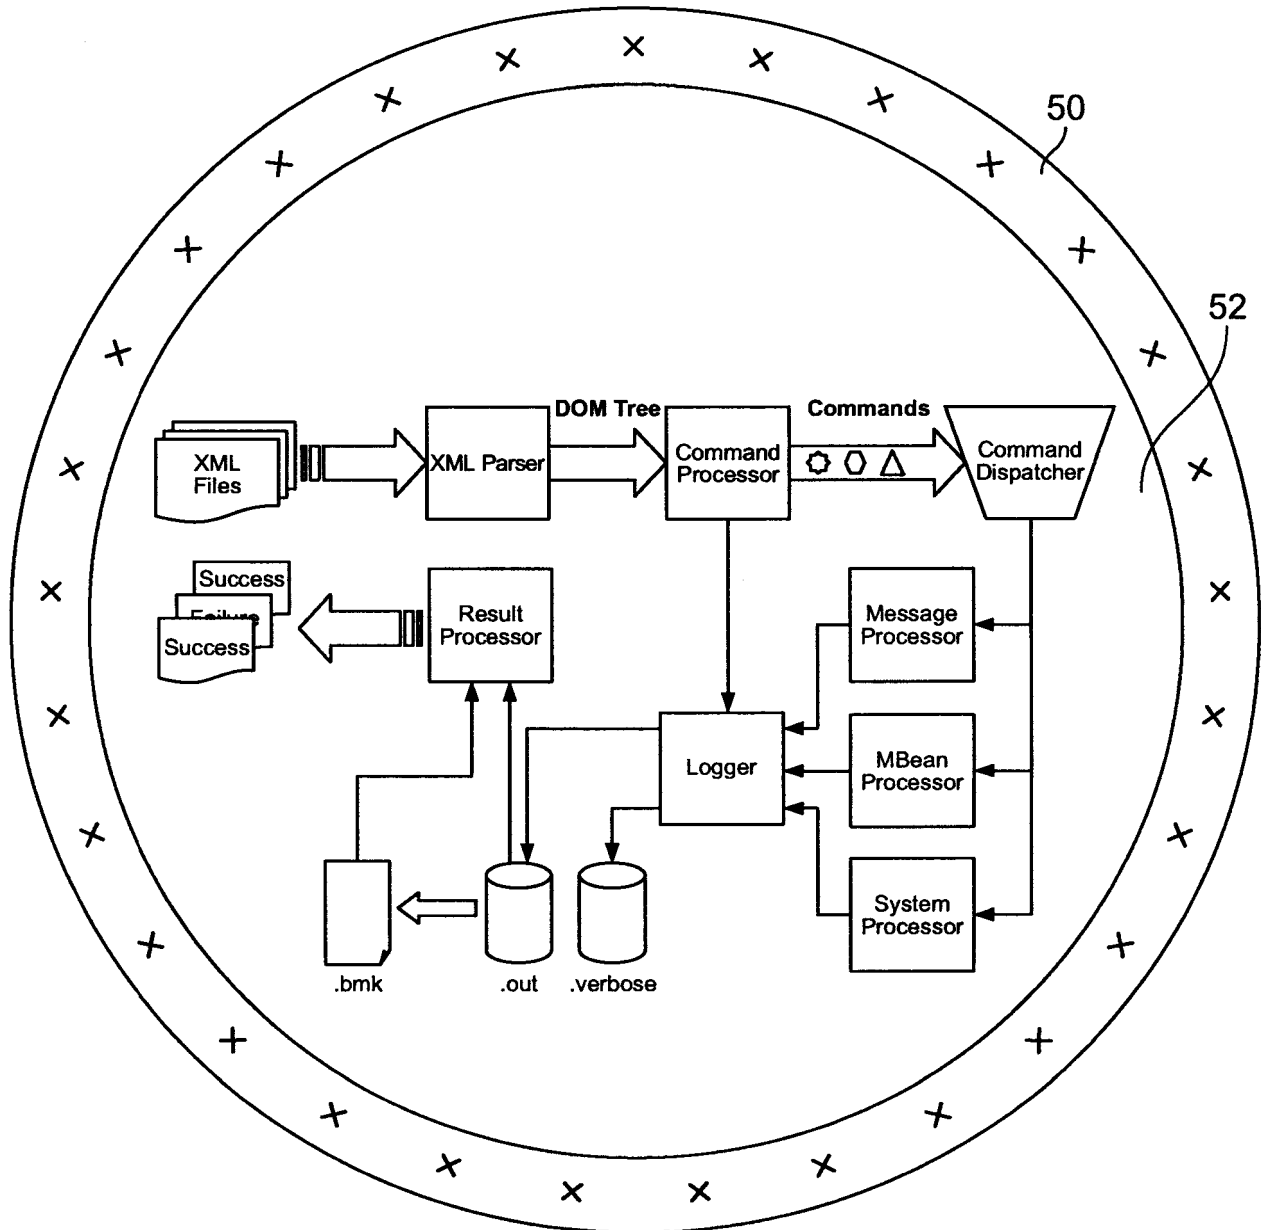


FIG. 2

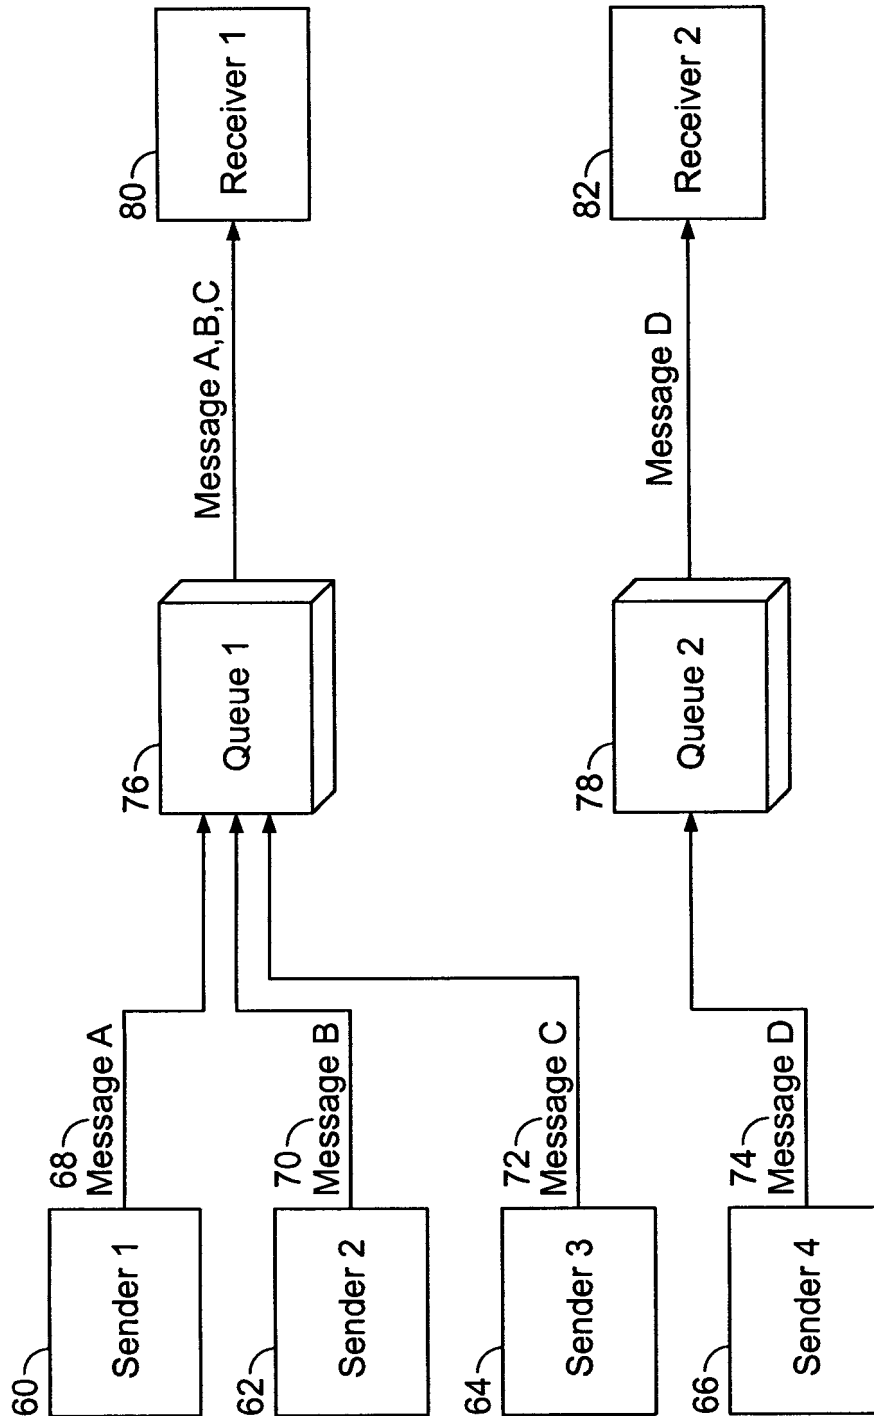


FIG. 3

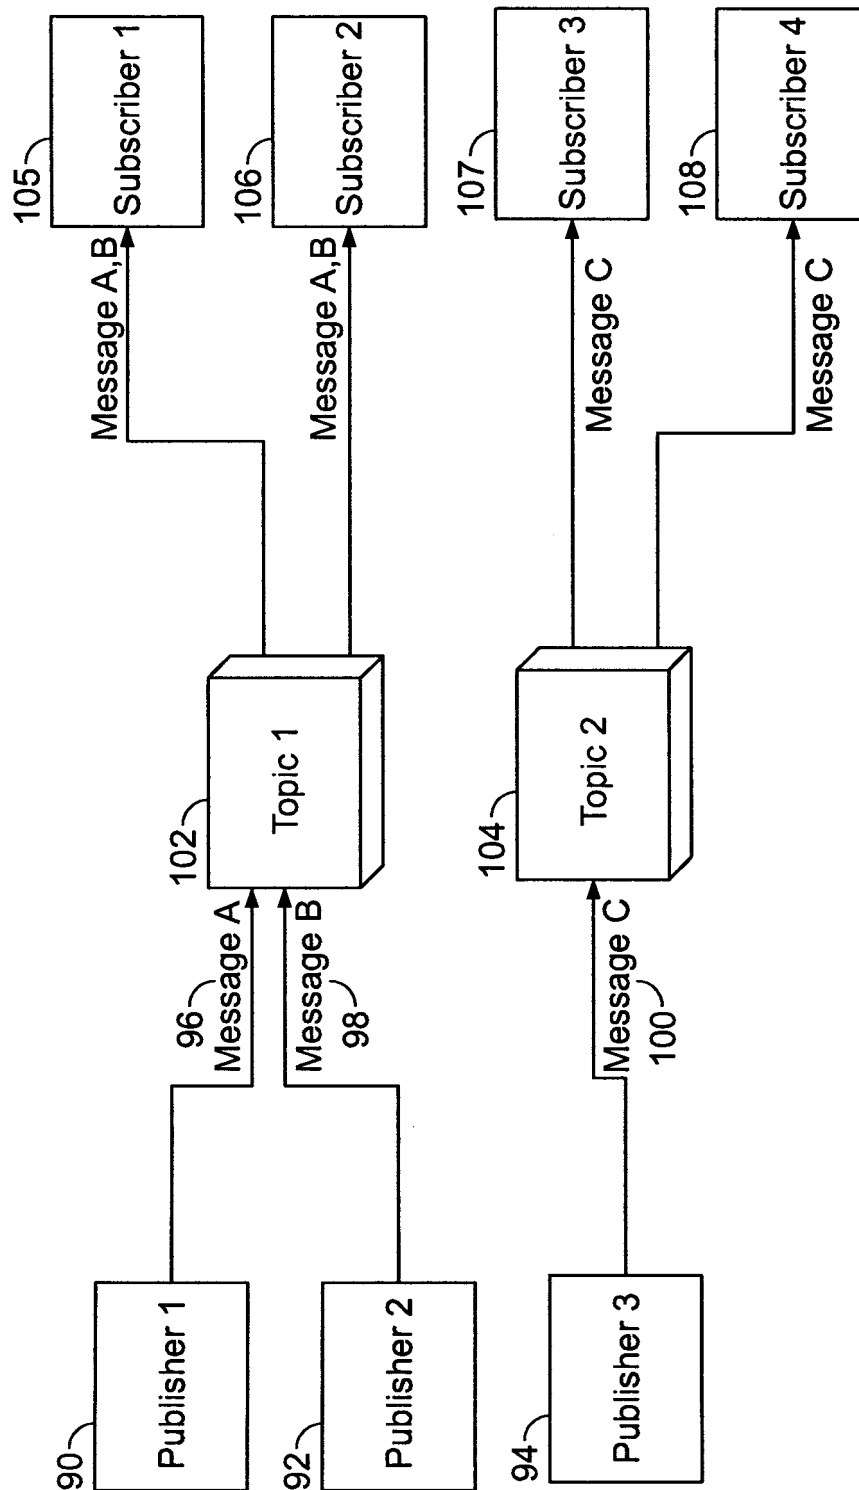


FIG. 4

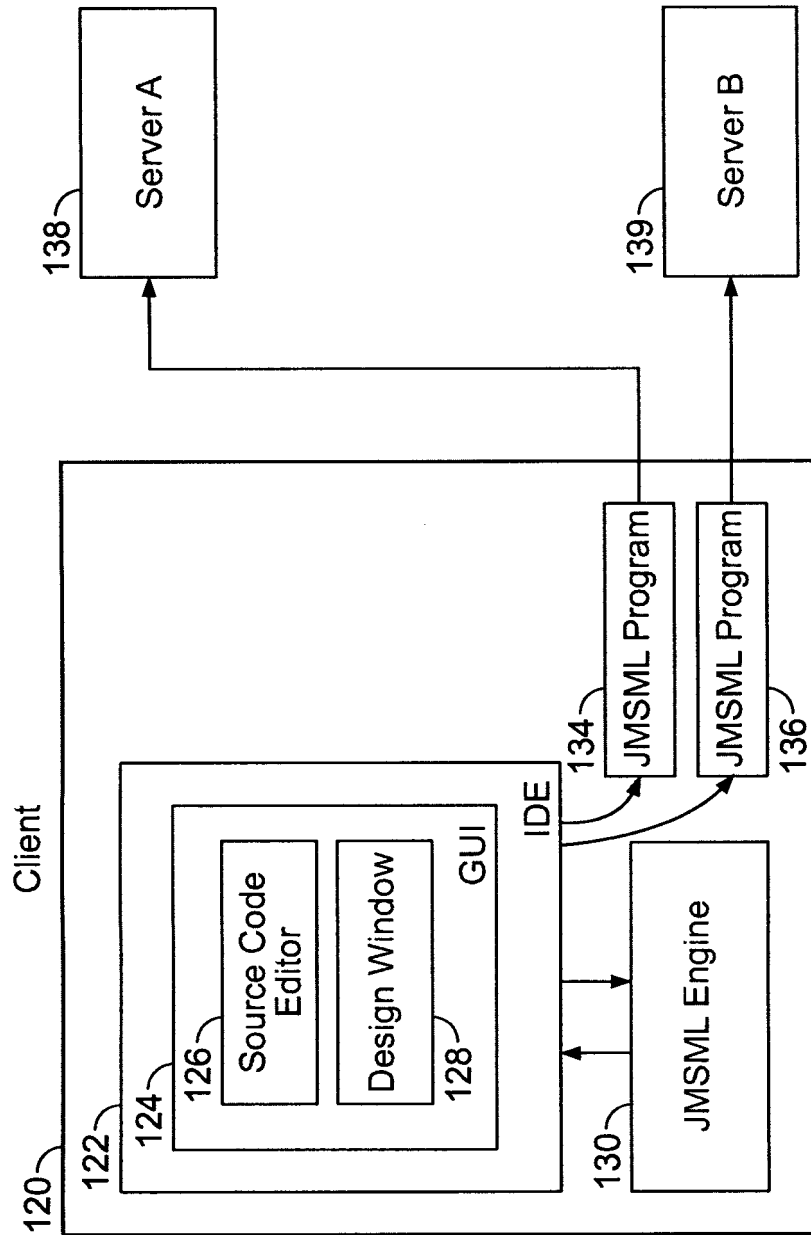


FIG. 5

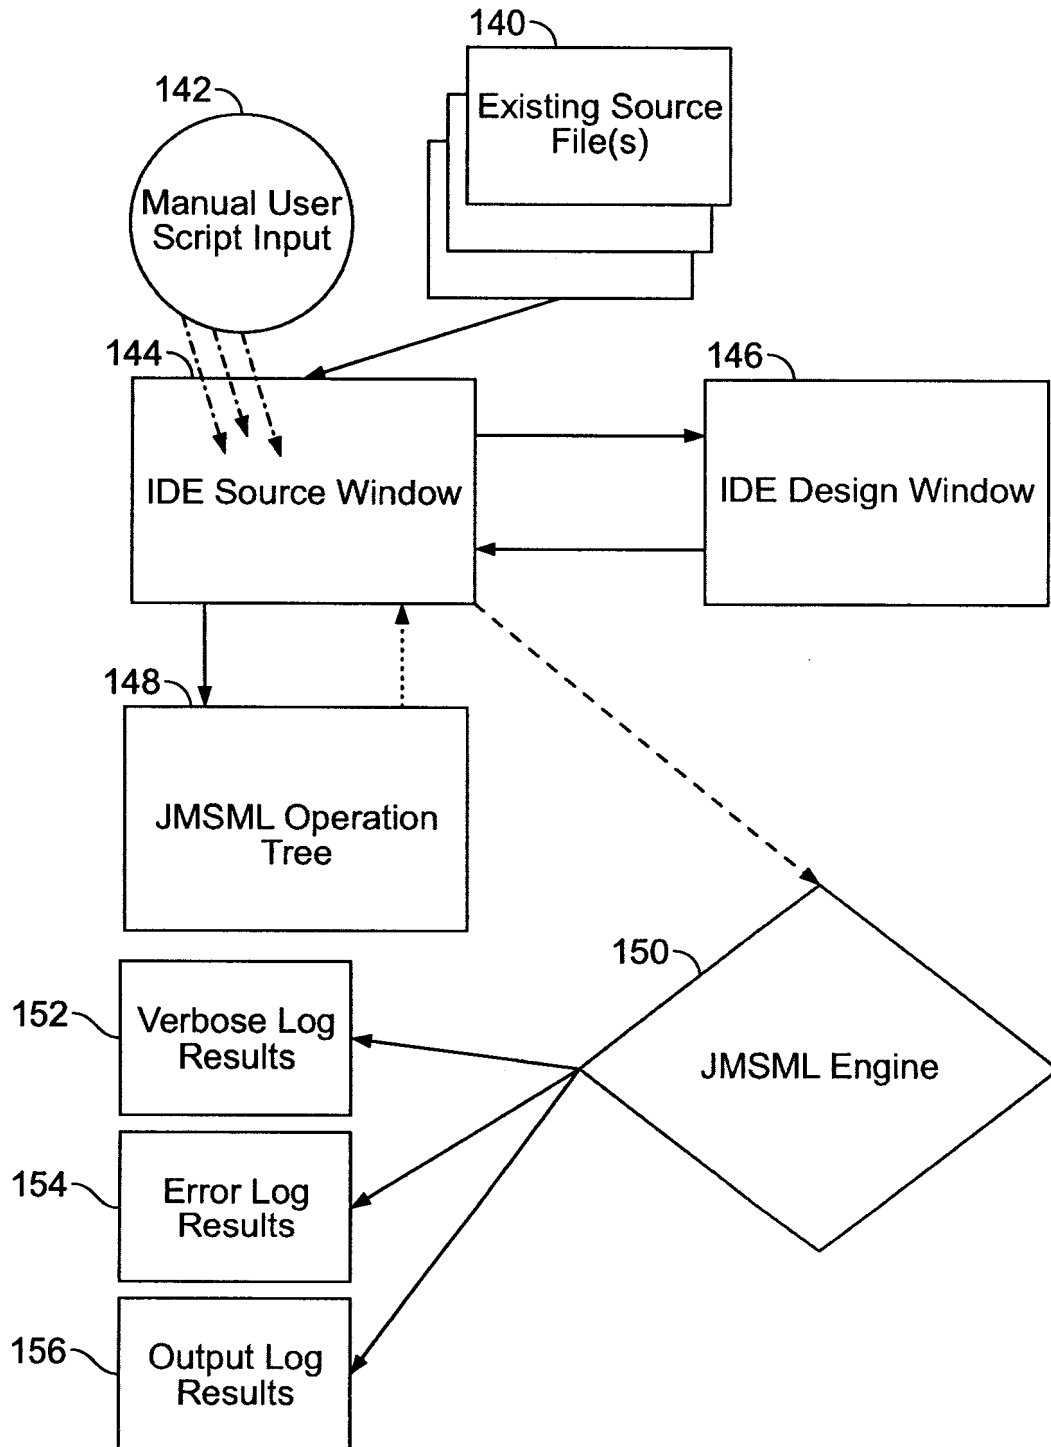
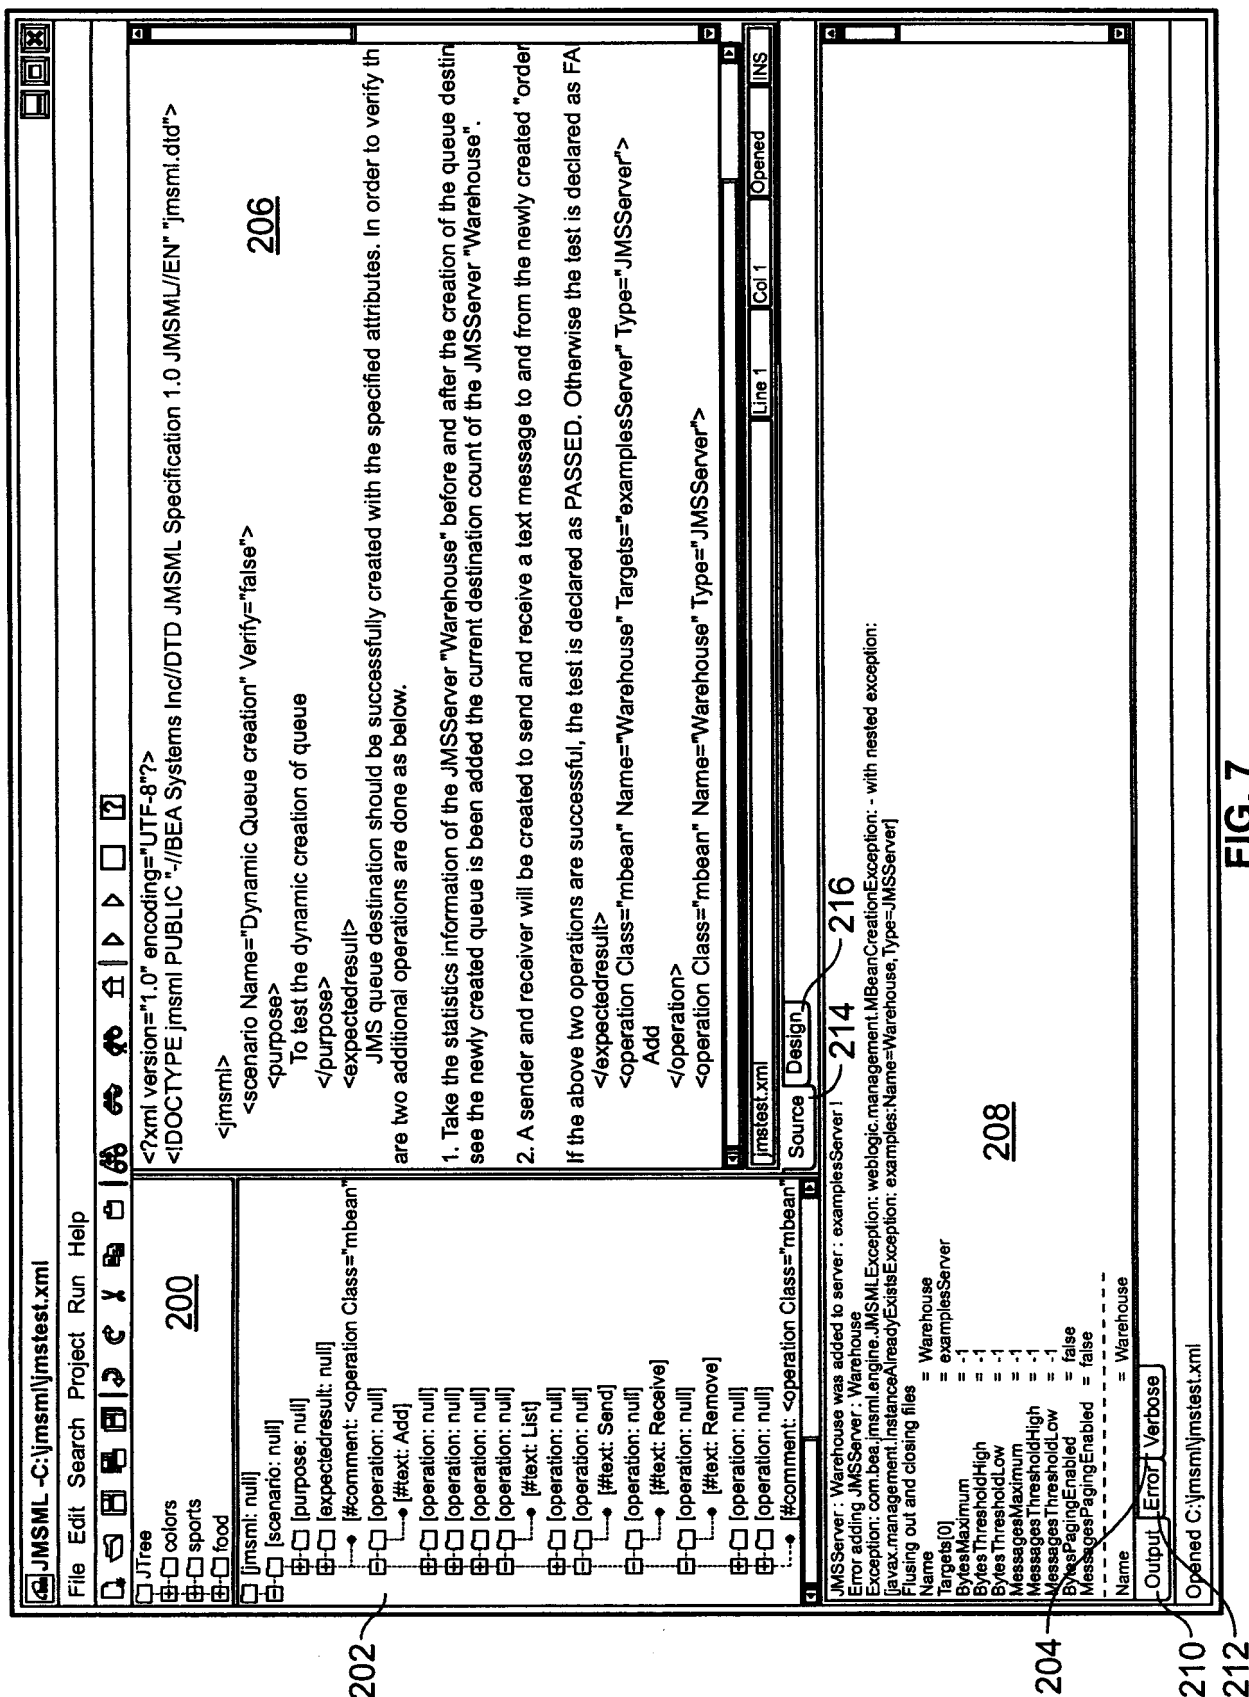
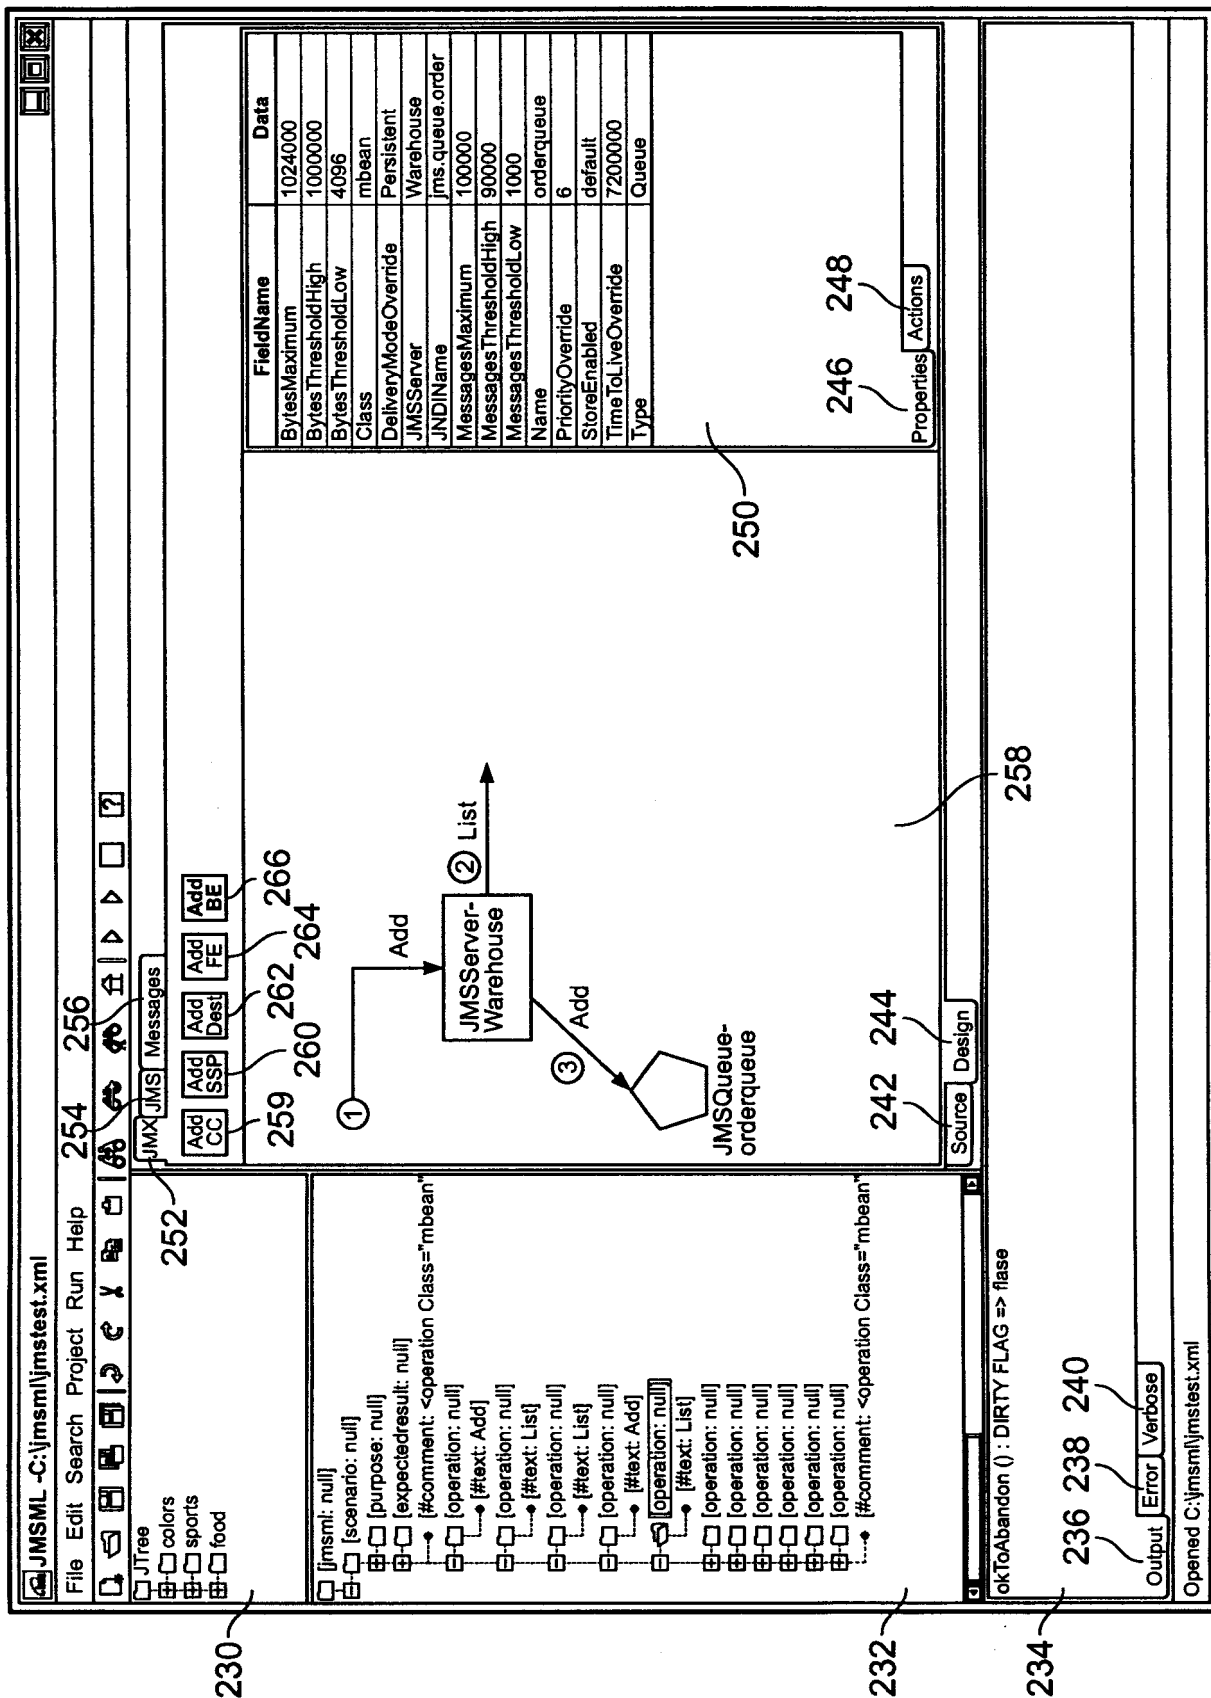


FIG. 6










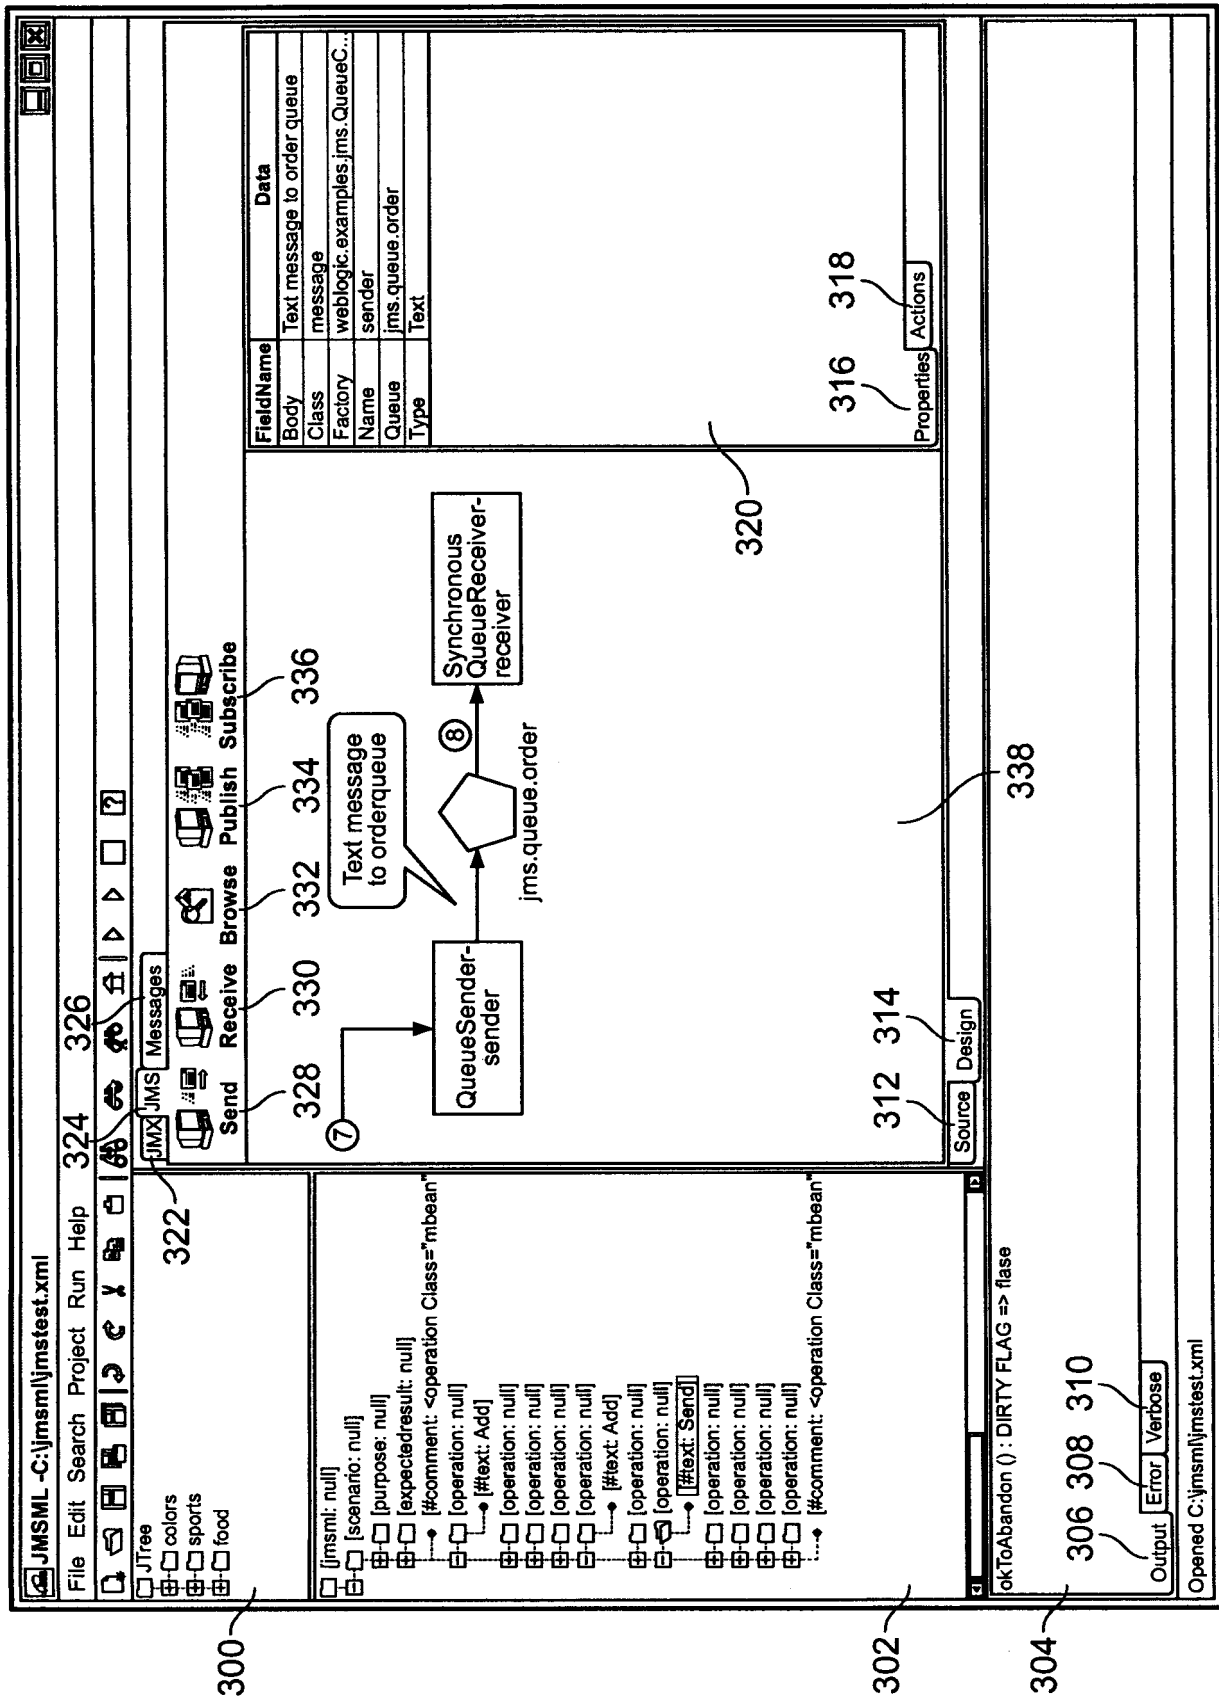


FIG. 9



**FIG. 10**

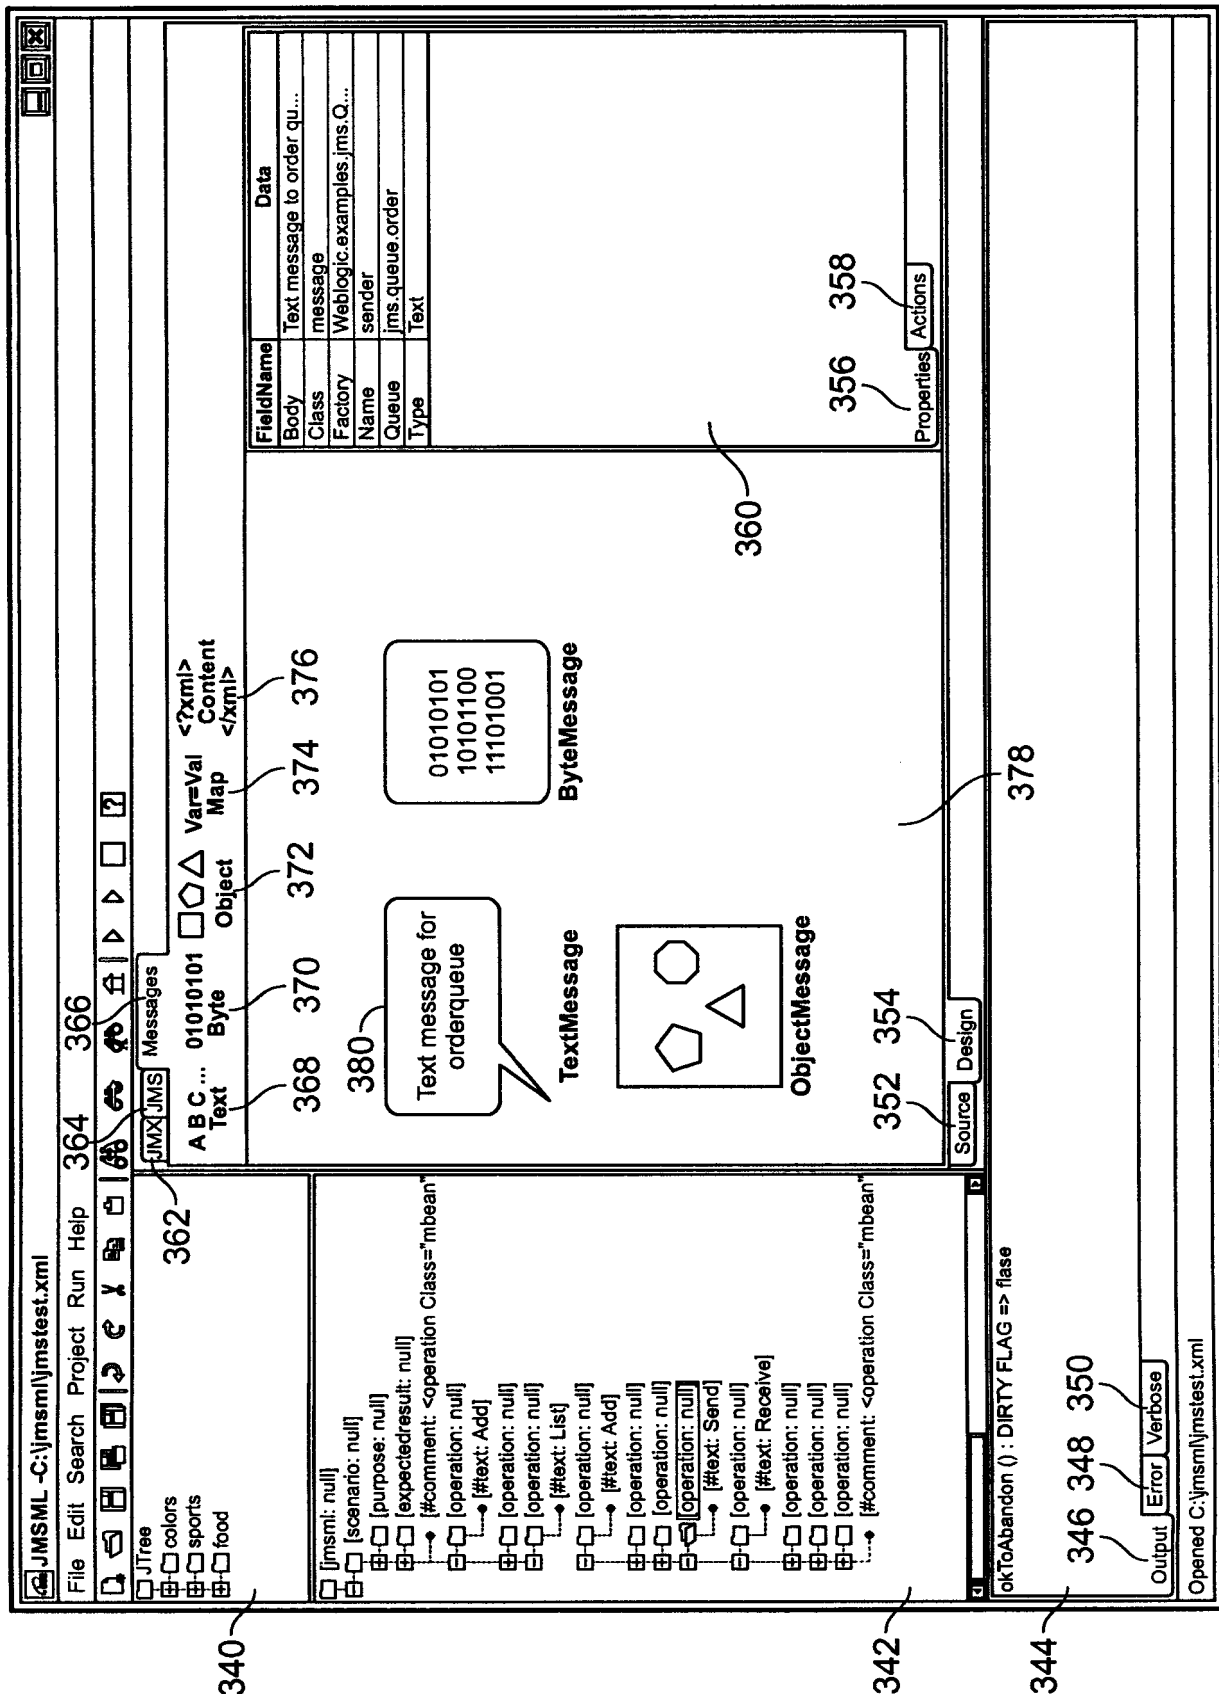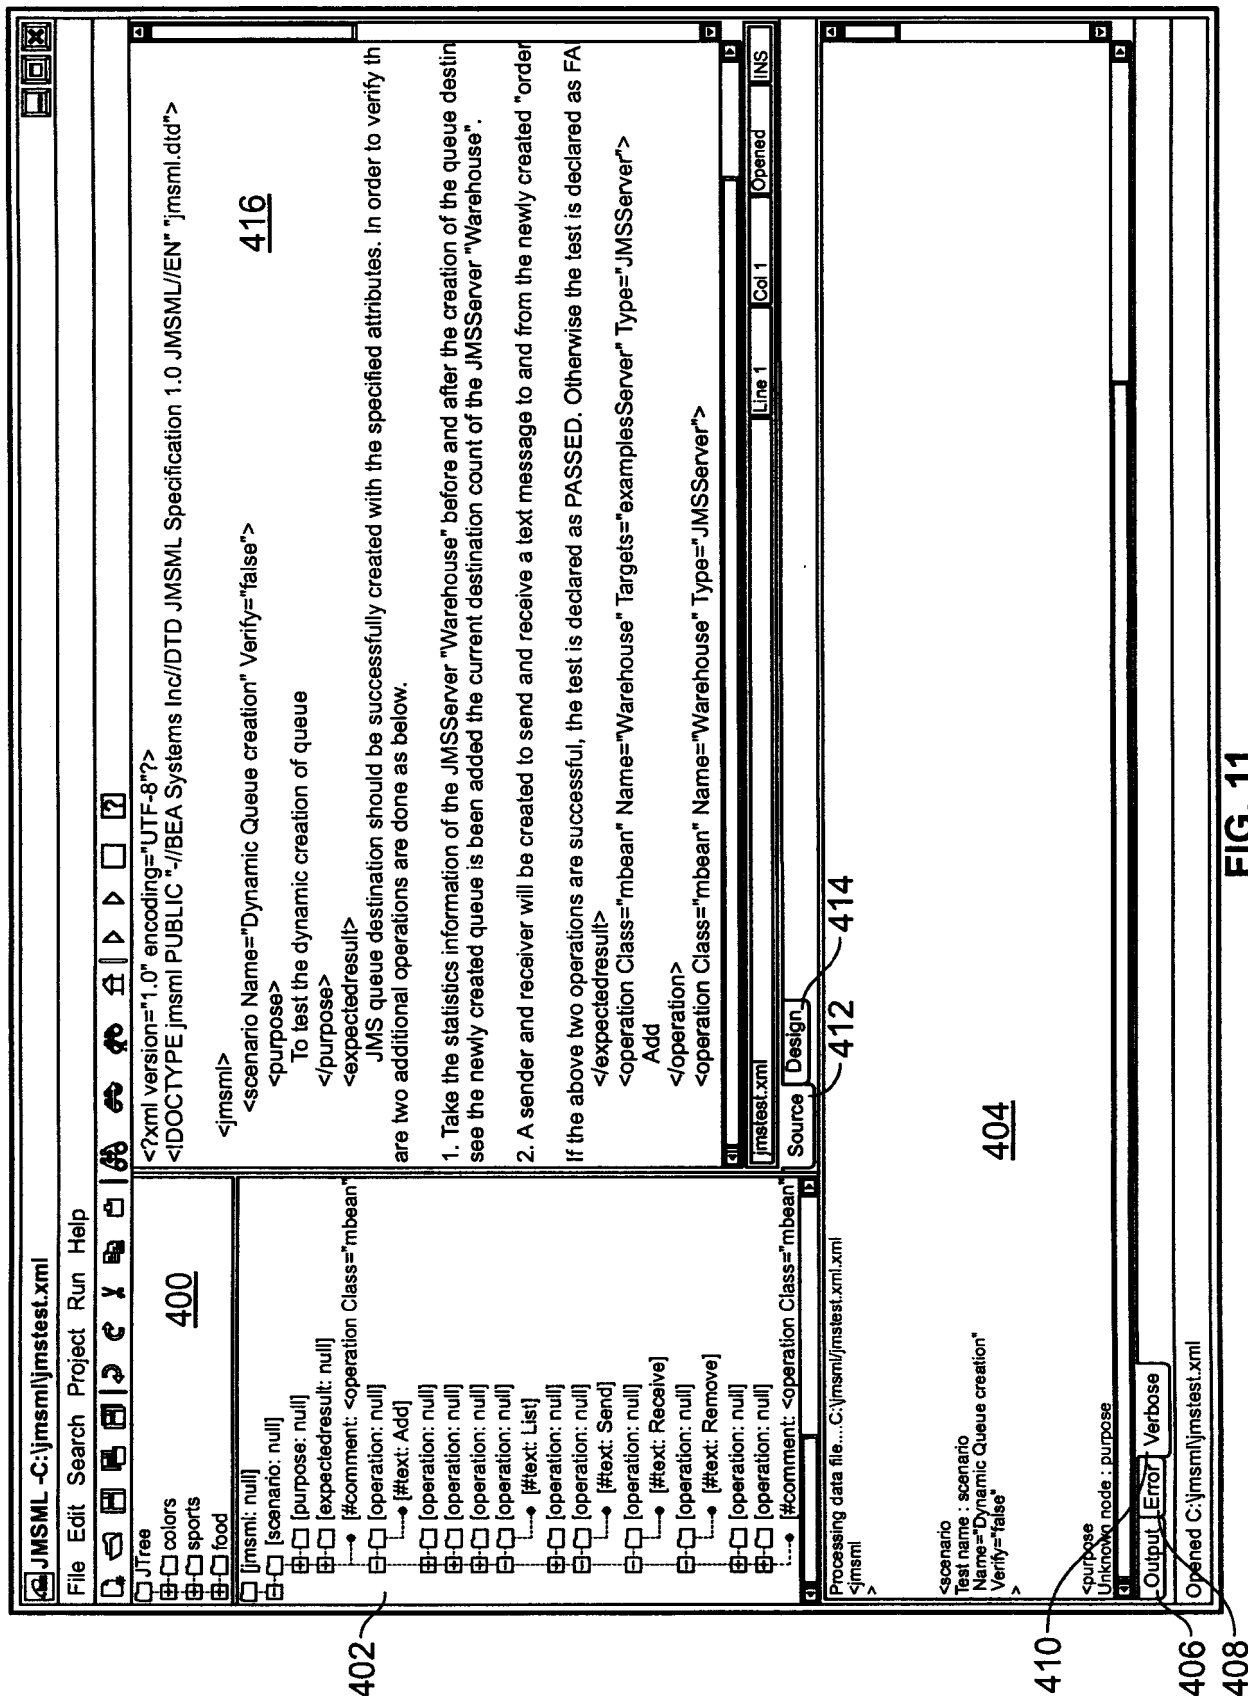

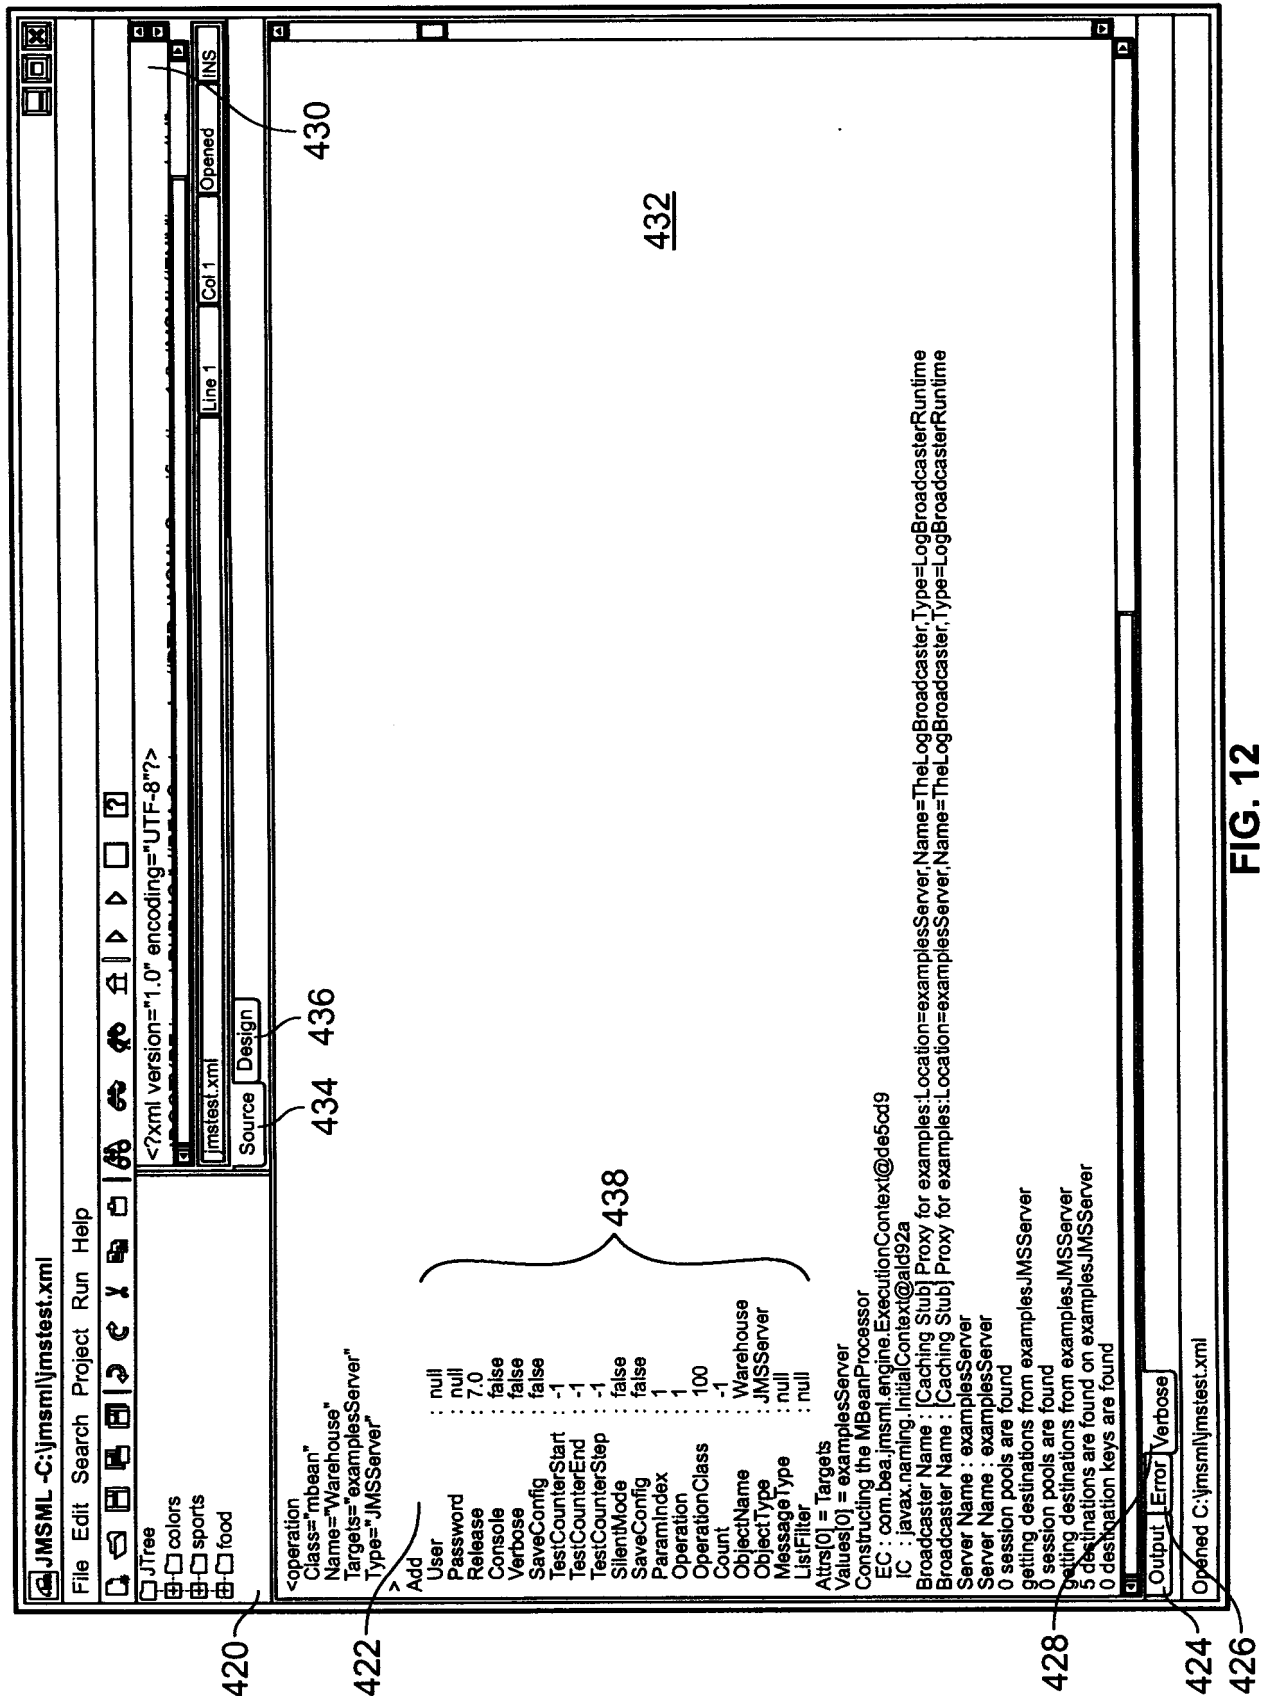

# REPLACEMENT SHEET

Drawing Sheet 13 of 19


Title: SYSTEM AND METHOD FOR JAVA MESSAGE SERVICE MARK-UP LANGUAGE

Inventors: Kathiravan Sengodan

Application No.: 10/602,037 Filing Date: June 23, 2003

Docket No.: BEAS-01351US1

Attorney: Karl F. Kenna Telephone No. (415) 362-3800

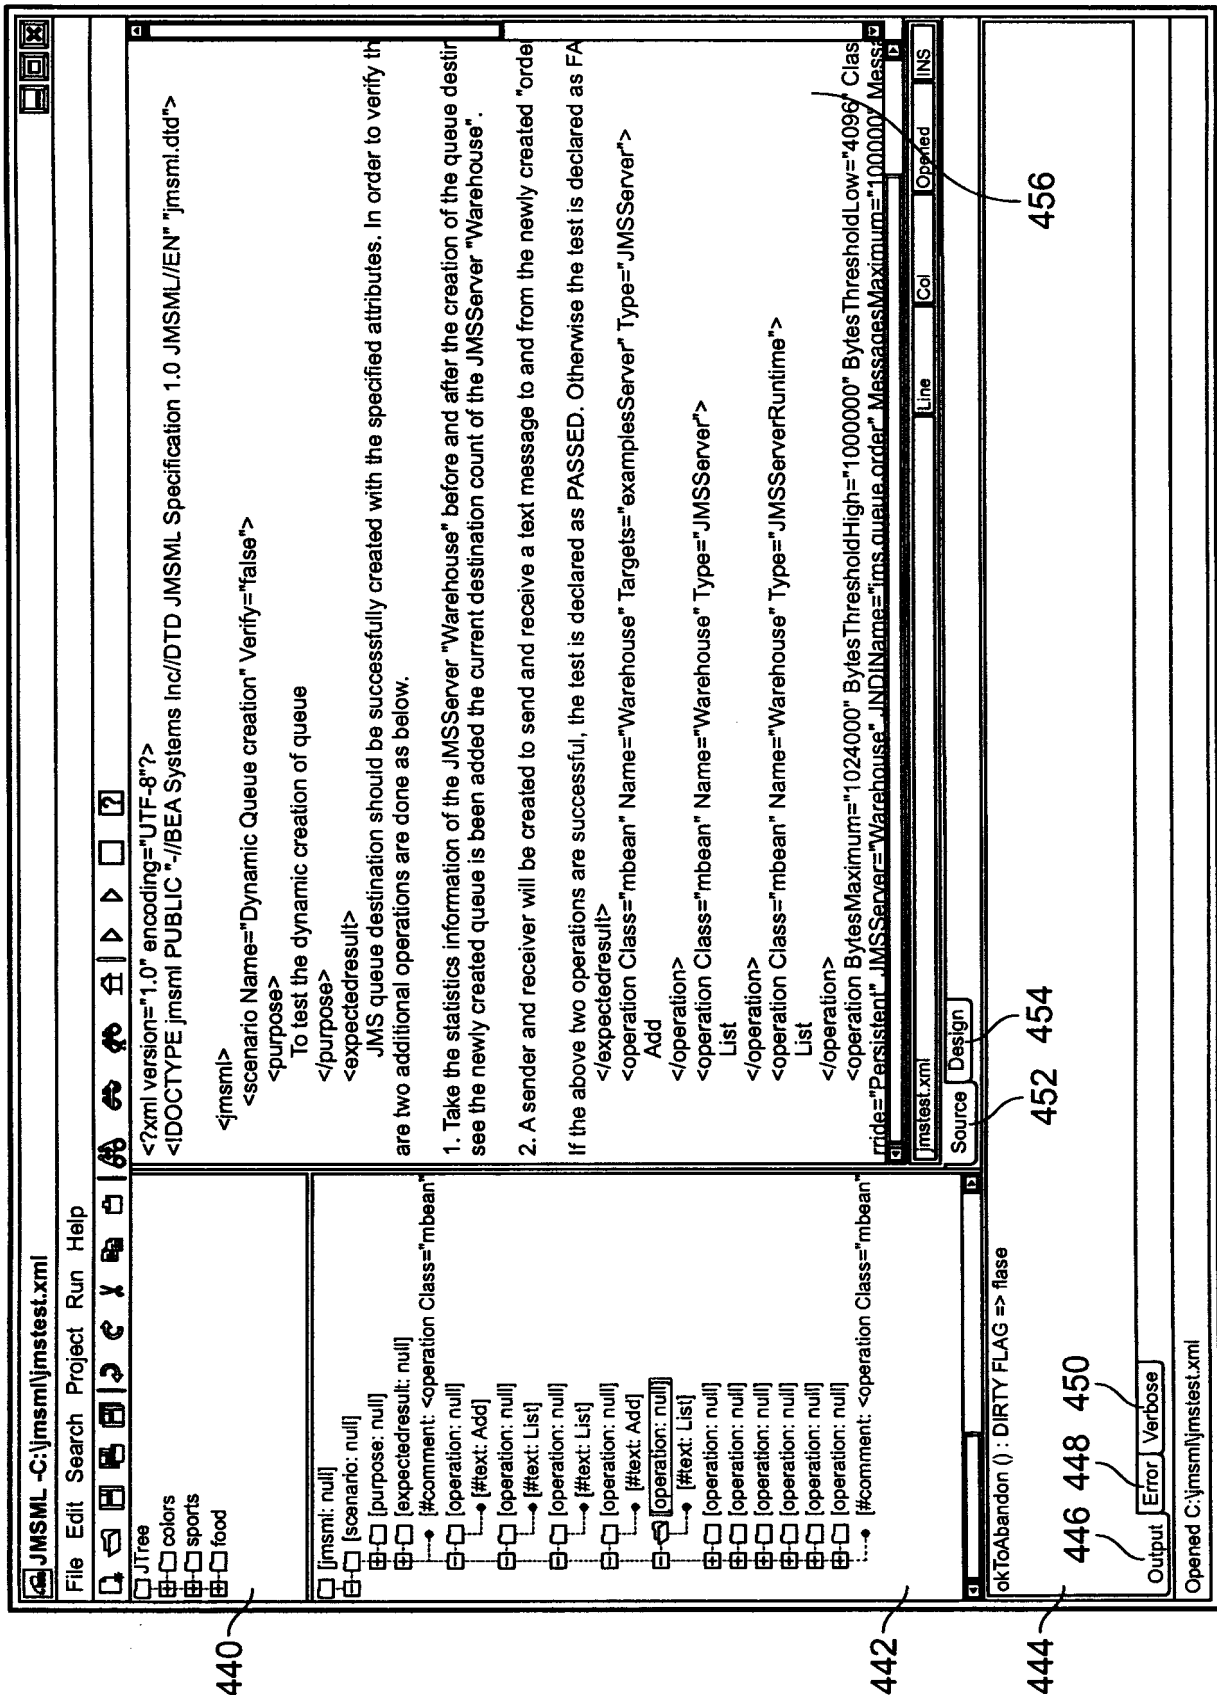

# REPLACEMENT SHEET

Drawing Sheet 14 of 19

Title: SYSTEM AND METHOD FOR JAVA MESSAGE SERVICE MARK-UP LANGUAGE

Inventors: Kathiravan Sengodan

Application No.: 10/602,037 Filing Date: June 23, 2003

Docket No.: BEAS-01351US1

Attorney: Karl F. Kenna Telephone No. (415) 362-3800

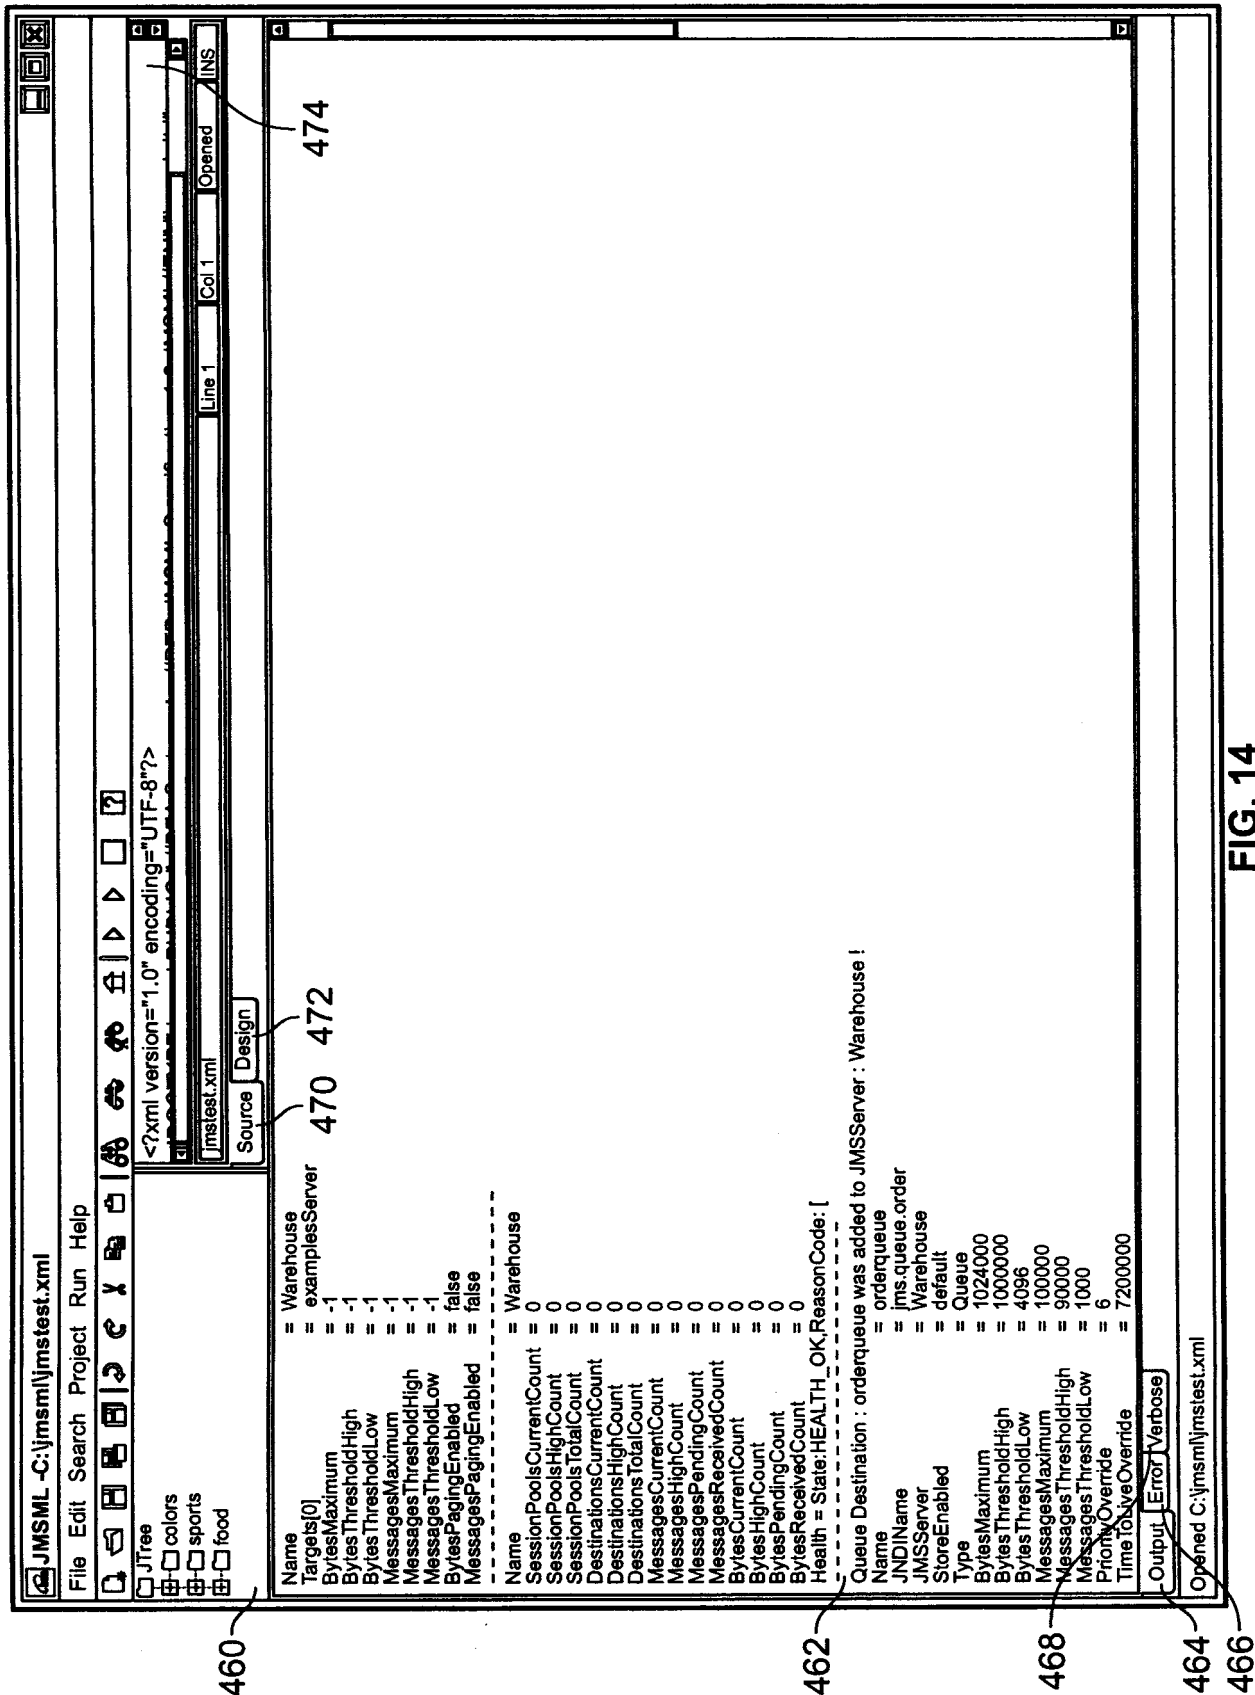


FIG. 14

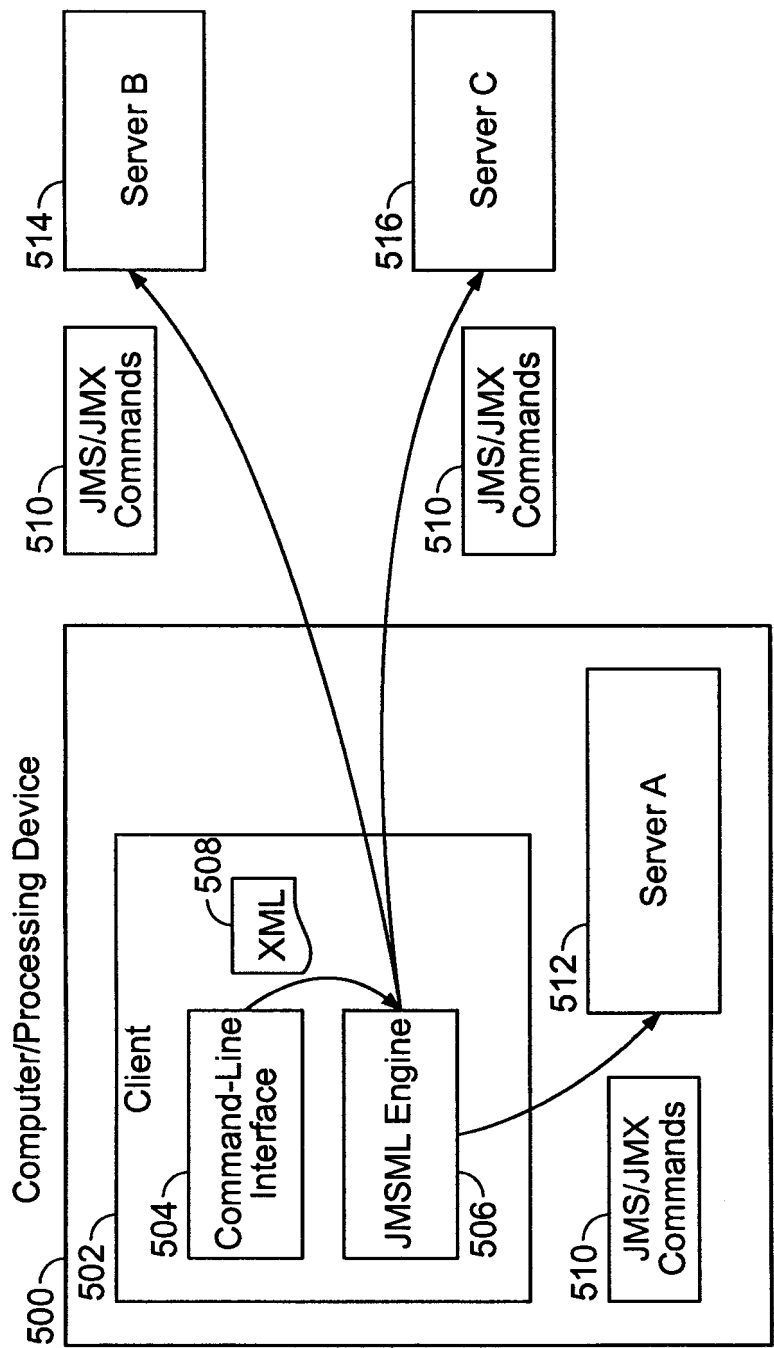
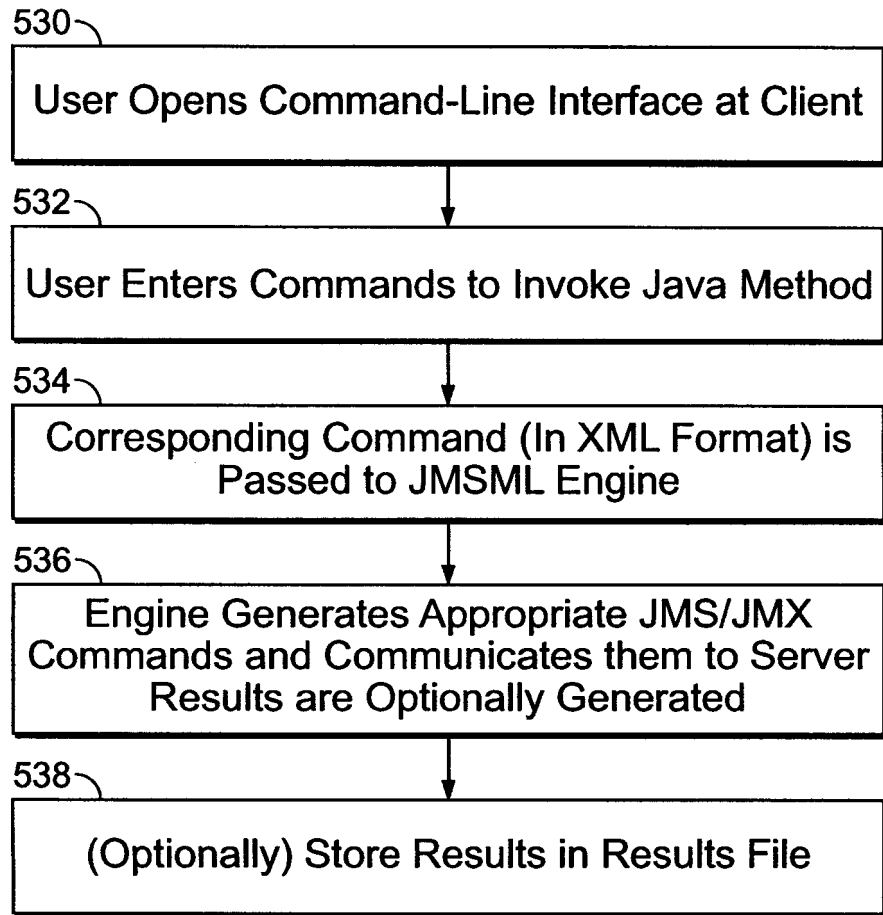


FIG. 15



**FIG. 16**



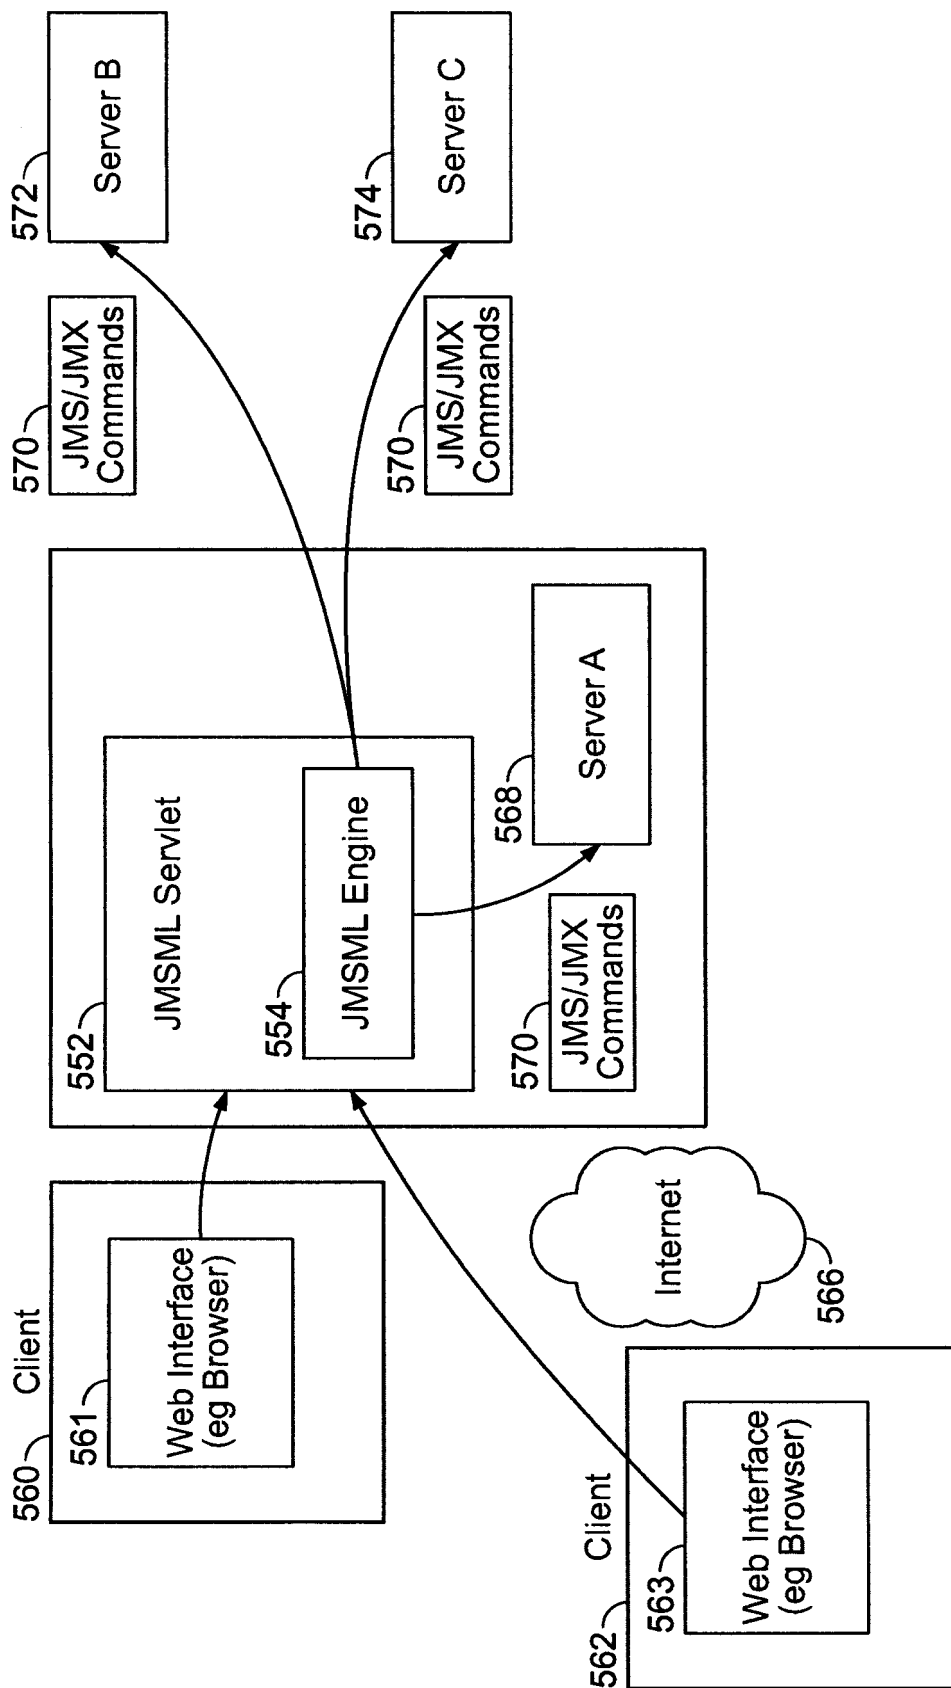
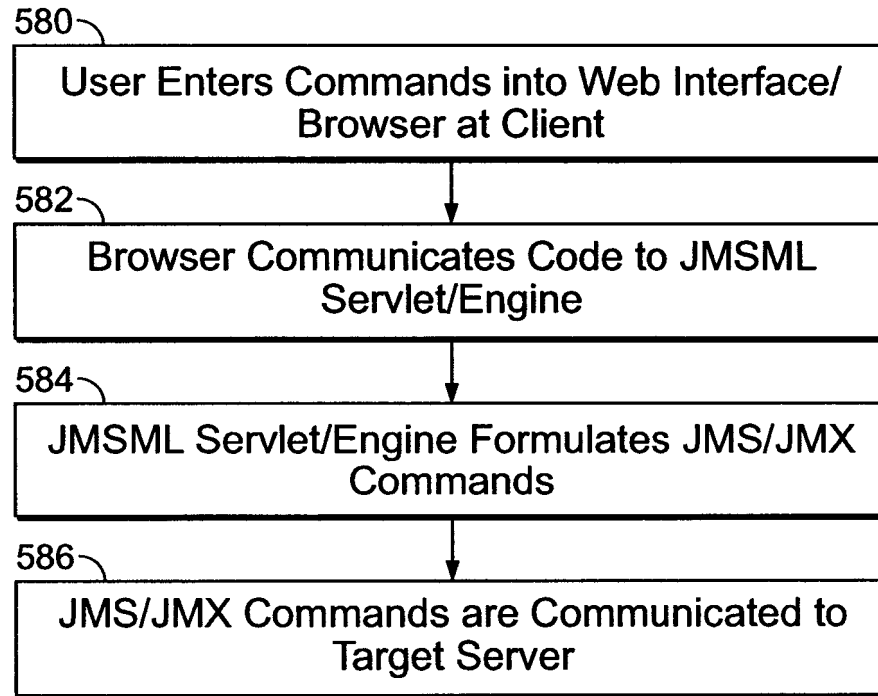


FIG. 17



**FIG. 18**

**JMSML - Web Interface**

Please select any type of URL specification and type in the XML operation element to execute JMS functions.

☐ URL : // :

☒ URL : [t3]://localhost : [7001]

Username: system

Password: gumby1234

XML File:

Address http://172.18.46.49:7001/jmstesthelpers/jmsml

Server URL : t3://172.18.46.49:7001

Verbose ☐ Release: 6.0

Execute Clear Save Results

---

### JMSML - Web Interface

Please select any type of URL specification and type in the XML operation element to execute JMS functions.

☐ URL : // :

☒ URL : [t3]://localhost : [7001]

Username: system

Password: gumby1234

XML File:

Address http://172.18.46.49:7001/jmstesthelpers/jmsml

Server URL : t3://172.18.46.49:7001

Verbose ☐ Release: 6.0

Execute Clear Save Results

---

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE test PUBLIC "-//BEA Systems
Inc/JMS Test Specification 1.0
JMSTest/EN" "jms-test.dtd">

<test
Name="JMSServer_conf_add_default_norm3"
Verify="false">

<operation Class="mbean"
Type="JMSServer" Name="newBE3"
Targets="myserver"
BytesMaximum="1024"
BytesThresholdHigh="512"
BytesThresholdLow="64"
MessagesMaximum="100"
MessagesThresholdHigh="50"
MessagesThresholdLow="10">Add</operation>

<operation Class="mbean"
Type="JMSServer"
Name="newBE3">List</operation>

<operation Class="mbean" Type="Queue"
Save Results Verbose Release: 6.0 Execute Clear Save Results
```

```
JMSServer : newBE3 was added to
server : myserver !
Name = newBE3
Targets [0] = myserver
BytesMaximum = 1024
BytesThresholdHigh = 512
BytesThresholdLow = 64
MessagesMaximum = 100
MessagesThresholdHigh = 50
MessagesThresholdLow = 10

Queue Destination : newQ3 was added to
JMSServer : newBE3 !
Name = newQ3
JNDIName =
qajms.destination.newQ3
JMSServer = newBE3
StoreEnabled = default
Type = Queue
BytesMaximum = -1
BytesThresholdHigh = -1
BytesThresholdLow = -1
MessagesMaximum = -1
MessagesThresholdHigh = -1
```

```
Processing data file...../jms6958.xml
<test
Test name : test
Name="JMSServer_conf_add_default_norm3"
Verify="false">

<operation
BytesMaximum="1024"
BytesThresholdHigh="512"
BytesThresholdLow="64"
Class="mbean"
MessagesMaximum="100"
MessagesThresholdHigh="50"
MessagesThresholdLow="10"
Name="newBE3"
Targets="myserver"
Type="JMSServer"
>Add
User : null
Password : null
Release : 6.0
```

**FIG. 19**